


Features

- Efficiency 52.4%.
- Swing down solid lamp shield for easy relamping and maintenance.
- Fully recessed luminaire and lamp compartment.
- 95% Reflective Alter soft white paint finish.
- Specular interior reflector.
- One piece body for easy installation.
- Easy access to ballast through lamp compartment.
- Fits standard T-Grid ceilings.
- Optional acrylic drop-down visual element.




Mounting Methods / Features

Ceiling compatibility




Suited to standard exposed
T-grid ceilings




Suited to standard exposed
Slot T-grid ceilings



Swing down optical system for
easy relamping and maintenance

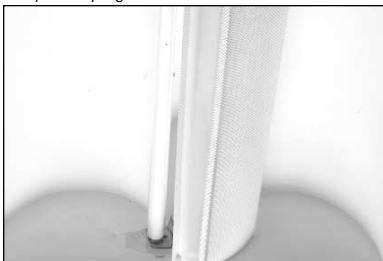

Also available with
Microperforated mesh
lamp shields



Dimensions

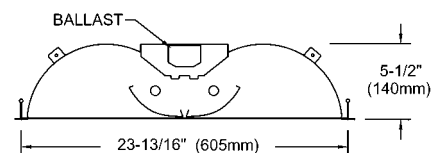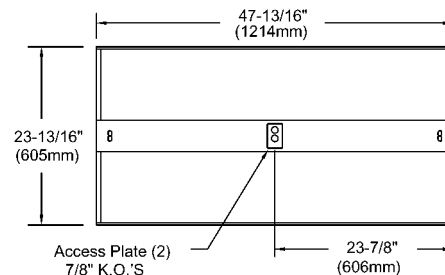

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

Lightolier a Genlyte Thomas Company

www.lightolier.com

Technical Information: (978) 657-7600 • Fax (978) 658-0595

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.



© 2002 Genlyte Thomas Group LLC (Lightolier Division)

A0902

Section 5 / Folio L30-15

LIGHTOLIER®

Photometry

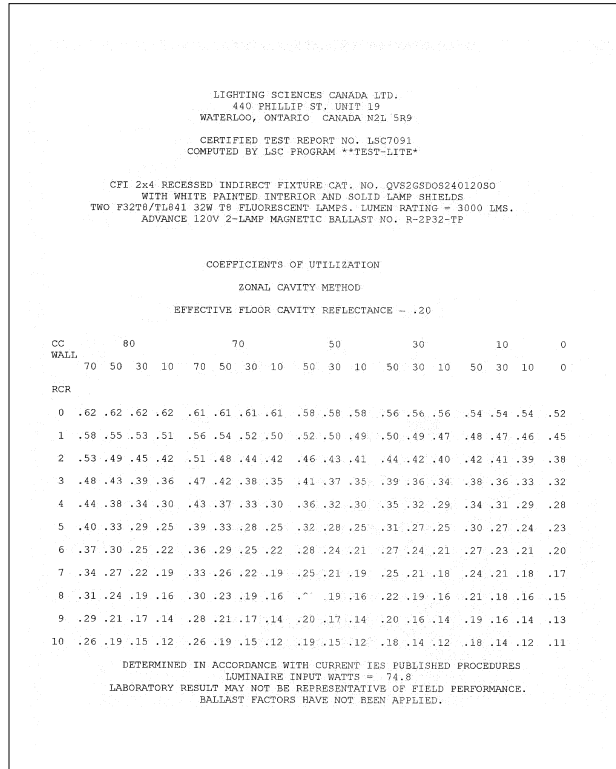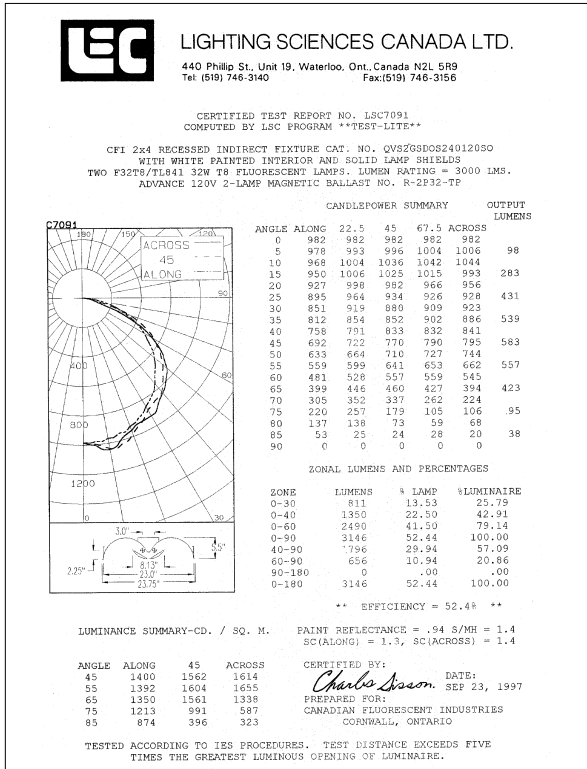

Ordering Information

Explanation of Catalog Number. Example: QVS2GSD0S232120S0

QVS	2	G		2	32			
QUALITY VISUAL STATIC Recessed direct indirect soft light optical system	FIXTURE WIDTH: 2'	CEILING TYPE: Standard exposed T-grid ceilings	LAMP SHIELD: PF = Microperforated SD = Solid	LAMP QUANTITY	LAMP/FIXTURE LENGTH: (NOMINAL 48") 32 = 32W T8	VOLTAGE: 120V 277V 347V	BALLAST: OC = Magnetic T8 SO = Electronic T8 instant start SR = Electronic T8 rapid start PS = PowerSpec HDF Dimming T8 (Not available in 347V.)	OPTIONS: R = Radio Interference Filter O = Emergency Lighting System (for Canada) N = Emergency Lighting System (for U.S.)
			CLEAR POLISHED ACRYLIC DROP DOWN VISUAL ELEMENT: OS = Open slot (no acrylic) OP = One Piece (no center slot) GC = Clear acrylic GG = Clear acrylic / Green projected color face GB = Clear acrylic / Blue projected color face GR = Clear acrylic / Red projected color face					

Specifications

MATERIALS: One piece chassis constructed from die formed 20 gauge cold rolled steel. Reflectors - 95% reflectance baked white acrylic matte paint finish. Specular interior reflector.

FINISH: Chassis exterior - phosphate undercoating, baked white acrylic matte high reflectance paint finish.

ELECTRICAL: Rapid start HPF, thermally protected class "P" ballast. If K.O.s are within 3" of ballast use wire suitable for at least 90C.

LABELS: Listed by



Job Information

Type:

Lightolier a Genlyte Thomas Company

www.lightolier.com

Technical Information: (978) 657-7600 • Fax (978) 658-0595

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2002 Genlyte Thomas Group LLC (Lightolier Division)

A0902

Section 5 / Folio L30-15

LIGHTOLIER